

AMPLIFIER (DC STRAIN)



DSA-330T

DC STRAIN AMPLIFIER

Strain type / DC / mV/V input type

Feature

DVA-330T Model is DC STRAIN GAUGE (mV/V)
Multi-step filter integrated.


Zero set by volume control
Function control by dip s/w.

- 1 channel/ 1 unit
- Perfect solution of NOISE
- Highly efficient TEMPERATURE features
- Lowpass filter function
 - 10Hz, 100Hz, 500Hz, W/B
- EXC : 5VDC, 10VDC

Specifications

Analog specification	INPUT SIGNAL	$\pm 0.5\text{mV/V} \sim \pm 3.5\text{mV/V}$
	ANALOG OUTPUT	0~5V, 1~5V, 0~10V (Option 0~20mA, 4~20mA)
	EXCITATION	5VDC, 10VDC (Front selectable)
General specification	Inout impedance	more than 10 M Ω
	Low pass filter	LOW PASS filter (10Hz, 100Hz, 500Hz) W/B
	Operation-temp	0~50 $^{\circ}\text{C}$
	Storage-temp	-20~60 $^{\circ}\text{C}$
	POWER SUPPLY	AC110V/220V (50~60Hz, 0.2A) , (Option DC 24V (0.3A))
	Weight	$\approx 400\text{g}$

제품 외형 (Unit : mm)

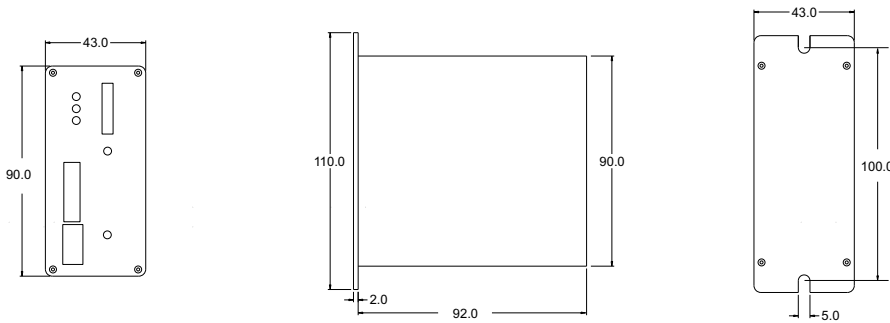

* Specifications are subject to change without notice.



DACELL Co.,Ltd.

Tel : +82-43-260-2242 / Fax : +82-43-260-2245

www.dacell.com

E-mail : info@dacell.com

AGENT